

## 56J1 AC/DC Power Supply

### 50-Watt Ruggedized Power Supply Conduction-Cooled, Single Output



Proudly made  
in the USA

#### Description

NAI's 56J1 is a 50-Watt AC/DC Power Supply that accepts multiple AC inputs plus a +270 VDC input. This COTS unit provides full-power output at a baseplate temperature of +85°C.

Standard features include remote error sensing; remote digital (TTL) turn on/off; and protection against transients, over voltage, over-current, and short-circuits. Options such as ESS vibration testing, and choice of output voltages are available, and additional options and special units can be ordered.

This conduction-cooled power supply is specifically designed with NAVMAT component derating for rugged defense and industrial applications. It is also designed to meet the many harsh environmental requirements of military applications.

#### Features



- Ideal for rugged, conduction-cooled, military applications
- Standard output voltages: 3.3 V, 5V, 12V, 15V, 24V, 28V
- Input transient protection per MIL-STD-704
- Integrated EMI filtering per MIL-STD-461
- High power density
- Low profile packaging
- Low noise
- Operates at full load through the entire -55°C to +85°C temperature range
- Contact factory for additional options and special units

## Electrical Specifications

AC Input Characteristics	
Input	115/230 VAC, 270 VDC (see tables of Pinout Designations and Input Connections for the J1 Connector, page 4); 270 VDC: input range of 170 VDC to 355 VDC
Input Tolerance	±10%
EMI/RFI	Designed to meet the requirements of MIL-STD-461D
Input Transient Protection	Per MIL-STD-704D; For nominal 115 VAC input: 180 VAC for 0.1 second For nominal 230 VAC input: 292 VAC for 0.1 second
Input Frequency	47 Hz to 440 Hz
DC Output Characteristics	
Output Power	See Output Power Table, page 3
Output Voltage	See Output Power Table, page 3
Efficiency	75% typical
Line Regulation	Within 0.1% or 10 mV (whichever is greater) for low to high line changes at constant load
Load Regulation	0.1% or 10 mV (whichever is greater) for 0 to 100% of rated load at nominal input line
PARD (Noise and Ripple)	50 mV p-p typical; 100 mV p-p maximum for 5 V outputs (20 MHz bandwidth); 1% of the output voltage, with a maximum of 200 mV p-p, for all other outputs (20 MHz bandwidth)
Load Transient Recovery	Output voltage returns to regulation limits within 0.5ms (typical), half to full load
Load Transient Under/Overshoot	0.35V maximum from nominal output voltage set point for 3.3V and 5V outputs; all other outputs 5%
Short Circuit Protection	Under any short circuit condition, continuous short circuit protection with auto recovery
Current Limiting	Limited to 130% of rated current
Over Voltage Protection	Automatic electronic shutdown if voltage exceeds 125% ±10%
Remote Error Sensing	Compensates for up to 0.5 V drop on output leads
Remote Turn On/Off	TTL logic 1 inhibits (turns off) the output; a floating input acts as a logic 0 (output on)
Isolation Voltage	1000 VDC input to output and input to case; 200 VDC output to case
Insulation Resistance	50 Mega Ohm at 50 VDC

All specifications are subject to change without notice.

### Additional Specifications

Physical/Environmental	
Temperature Range	Operating: -55°C to +85°C at 100% load, 400 Hz input (see Output Power Table below for deratings); Storage: -55°C to +125°C; (temperature measured at baseplate, conduction via baseplate only)
Temperature Coefficient	0.01% per °C
Shock	30 G's each axis per MIL-STD-810C, Method 516.2, Procedure 1; Hammer shock per MIL-S-901C
Acceleration	6 G's per MIL-STD-810C, Method 513.2, Procedure 11; 14 G's per Procedure 1
Vibration	Per MIL-STD-810C, Method 514.2, Procedure 1A
Reliability (MTBF)	200,000 hours, ground benign, at 50°C baseplate, per MIL-HDBK-217F
Humidity	95% at 71°C per MIL-STD-810C, Method 507.1 (non-condensing)
Altitude	40,000 feet per MIL-STD-810C, Method 504.1, Category 6 Equipment
Dimensions	See Mechanical Dimension Tables, page 6
Salt & Fog	Per MIL-STD-810C, Method 509.1
Sand/Dust/Fungus	Per MIL-STD-810C
Enclosure	Aluminum housing to aluminum baseplate
Finish	Cover: Black anodized; Baseplate: chemfilm
Interface	Connections via a D-subminiature connector (see Connector Specifications Table, page 4)
Weight	Single output = 8 ounces Typical

All specifications are subject to change without notice.

### Output Power

Volts	Current @ 400 Hz & 85°C	Current @ 400 Hz & 100°C	Current @ 60 Hz & 71°C	Current @ 60 Hz & 100°C
3.3	8	6	6.4	5
5.0	8	6	6.4	5
12.0	4.2	3.1	3.3	2.5
15.0	3.4	2.5	2.7	2
24.0	2.1	1.6	1.67	1.25
28.0	1.8	1.35	1.4	1

### Pinout Designations (J1)

Pin No.	Designation	Pin No.	Designation
1	INPUT	9	INPUT
2	INPUT	10	INPUT
3	-TTL (ON/OFF)	11	CHASSIS GND
4	+TTL (ON/OFF)	12	-SENSE
5	+SENSE	13	-OUTPUT
6	+OUTPUT	14	-OUTPUT
7	+OUTPUT	15	NC
8	NC		


### Input Connections (J1)

AC Type	Connection
115 VAC, 1Ø	1 & 2 (Neutral)
115 VAC, 3Ø Δ	1, 9 & 10
115 VAC, 3Ø, Y	1, 9, 10, 2 (Neutral)
230 VAC, 1Ø	1, 9 or 1, 10 or 9, 10
230 VAC, 3Ø Δ	1, 9, 10
270 VDC	1 (Positive), 9 (Return)


### Connector Specifications

Connector	Part # - Series
Unit	DAMME15PR
Mating	DAMM15S

### Output Wiring Diagrams

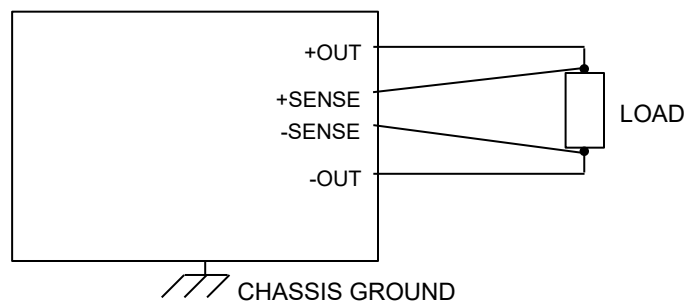

### Mechanical Layout

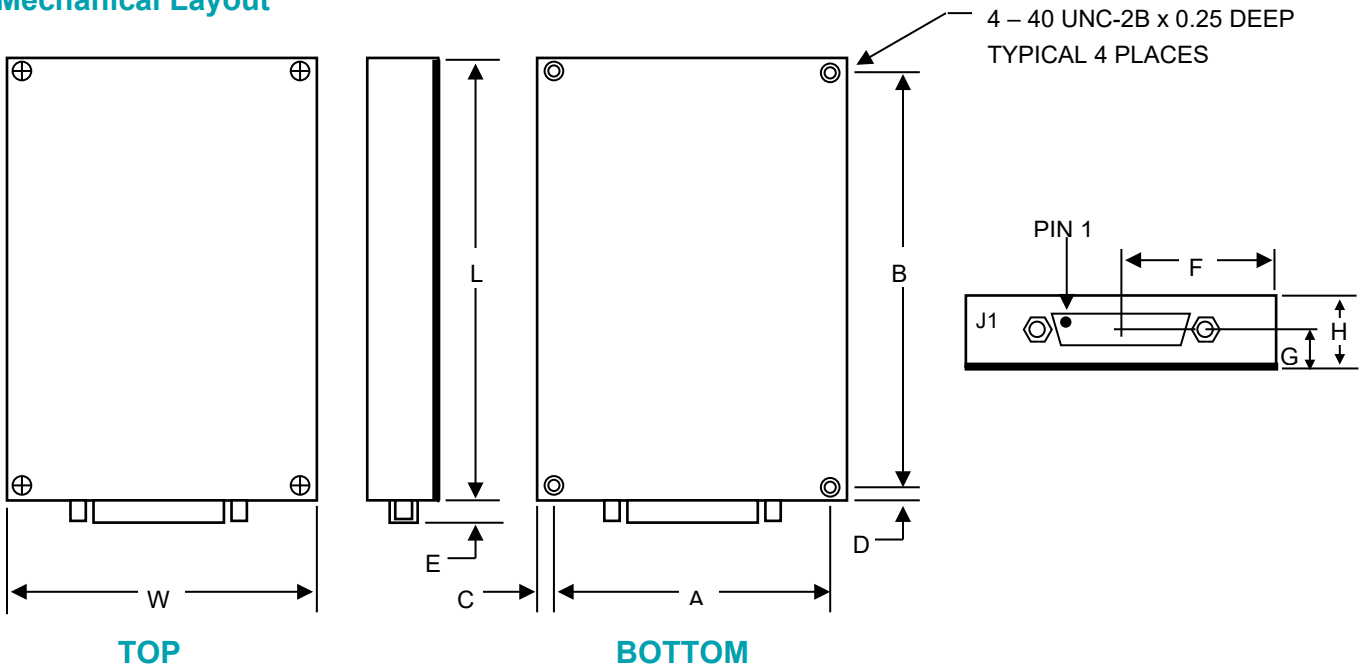

See tables below for Mechanical Dimensions.


### Mechanical Dimensions

Case*	Units	W	L	A	B	F
1	inches	3.25	4.0	2.85	3.60	1.63
1	mm	82.6	101.6	72.4	91.44	41.4

### Additional Dimensions

Dimension	Inches	Millimeters
C & D	0.2	5.1
E	0.23	5.84
G	0.455	11.56
H	0.8	20.3

### Ordering Information

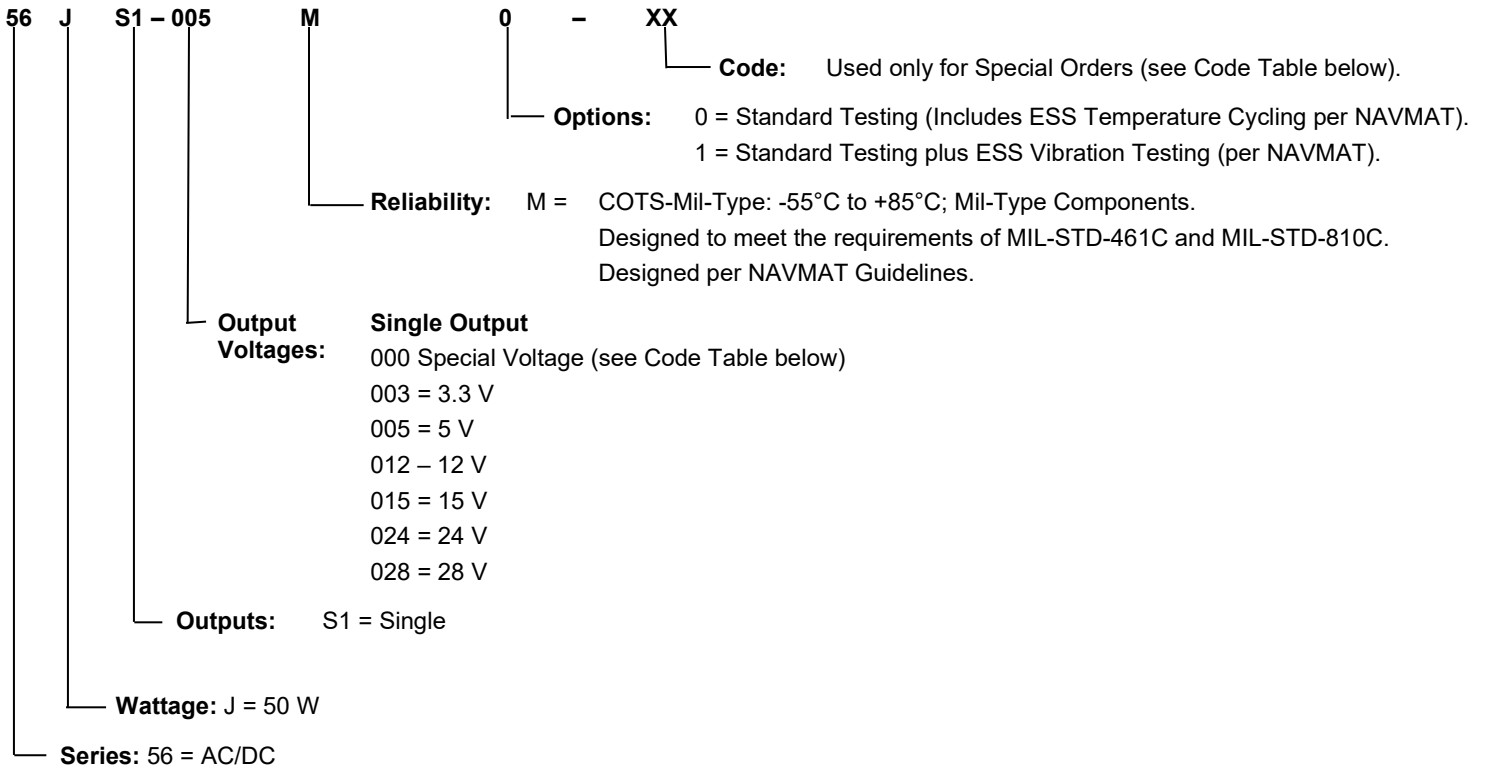

**Example:** 56JS1-012M0 = AC/DC; 50 Watt; Single Output; +12 V; COTS-Mil-Type; Standard Testing

### Code Table for Special Orders

Code	Description
01	Model #: 56JS1-000M0-01 - Single output of 5.2 VDC @ 9.6A
02	Encapsulated, Altitude to 70,000 feet per MIL-STD-810C, Method 504.1, Category 6 Equipment (Add approximately 2 ounces to weight)

**Consult Factory for Additional Options and/or Special Units**