




68INT6H 3U OpenVPX™ SOSA™ Aligned Single Board Computers Intel® Xeon® W Processor (Tiger Lake) (up to 8 Cores, to 2.6 GHz)

Configure to Customize

The **68INT6H** is a **SOSA** aligned 3U OpenVPX Intel® Xeon® W Processor (Tiger Lake) w/ 8 Cores & 24 M Smart Cache running up to 2.6 GHz Single Board Computer that can be configured with up to two Smart I/O and communications function modules (w/ NAI-XMC configuration option). Ideally suited for rugged Mil-Aero applications, the 68INT6H delivers off-the-shelf solutions that accelerate deployment of SWaP-optimized systems in air, land and sea applications.

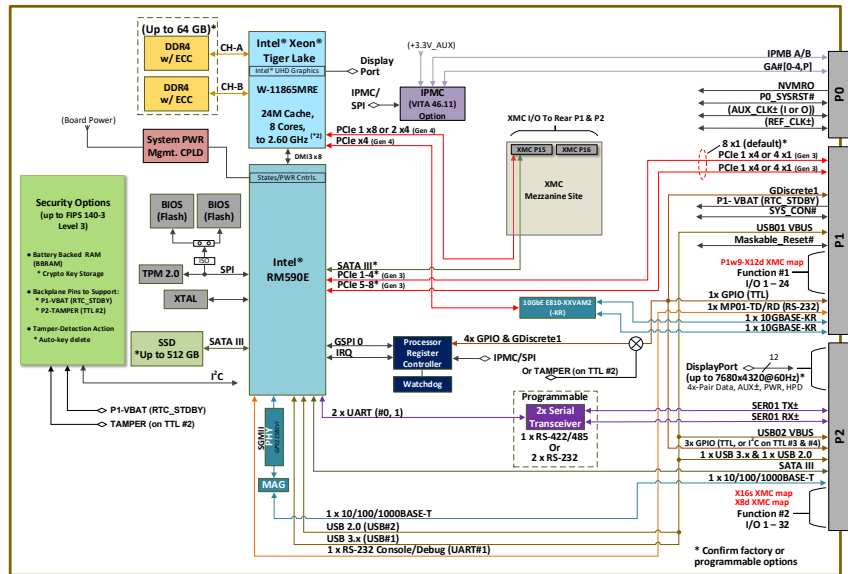


Features

- **3U OpenVPX (ANSI/VITA 65) SOSA™-aligned Profiles Supported:**
 - SLT3-PAY-1F1F2U1T1U1T-14.2.16
 - MOD3-PAY-1F1F2U1T1U1T-16.2.15-2
 - Data Plane: 1 x4 or 4 x1 PCIe (Gen 3)
 - Expansion Plane: 4 x1 or 1 x4 PCIe (Gen 3)
 - Combined Planes: 8 x1 PCIe (default) (configurable – contact factory)
 - Control Plane (P1): 2 x 10GBase-KR
 - Control Plane (P2): 1 x 1GBase-T
 - XMC P1w9-P1w14: or Module-1 I/O (24)
 - XMC P2w9-P2w16: or Module-2 I/O (32)
 - Video: DisplayPort
 - Up to 7680 x 4320 @ 60 Hz
 - 1 x USB 3.1 Gen 1 & 1 x USB 2.0
 - Off-board Storage I/F: SATA III
- **Processor/Memory**
 - Intel® Xeon® W Processor (Tiger Lake) to 2.6 GHz w/ 8 Cores & 24 M Smart Cache;
 - Intel 590E chipset
 - Up to 64 GB DDR4 SDRAM (2 banks)
 - Error correction code (ECC) memory
 - (up to) 512 GB SATA III SSD
 - Backup-boot NOR FLASH BIOS
- **Security / Cybersecurity (Option)**
 - FIPS 140-3 Level 3 Design Support
 - Crypto-key storage
 - Battery-backed RAM (external V-Bat)
 - Secure Boot
 - Anti-tamper / Tamper Detect & Erasure/Sanitize
- **Motherboard Peripheral I/O**
 - 4 x GPIO (TTL) standard
 - 1 x 422/485 or 2 x RS-232 Ports
 - RS-232 Maintenance Port
- **IPMC Support**
 - VITA 46.11 Tier-2, basic, compatible (configured option)
- **Smart I/O Functions (NAI-XMC Option)**
 - Support for 2 independent modules
 - PCIe interface to function slot #1 (e.g. for 2 additional Gig-E ports option)
 - SATA II interface to function slot #2 (e.g., for 2 TB expansion option)
- **Operating System Support**
 - Wind River® Helix™ Virtualization Platform, Linux, VxWorks® 7, Cert Edition, Windows®, Ubuntu 22.x Linux®, DDC-I Deos™, Lynx MOSA.ic, Green Hills INTEGRITY-178 tuMP
- **Background Built-in-Test**
 - Continuous BIT (as applicable)
- **COSA® Architecture**
- **Intelligent I/O library support**
- **Commercial or Rugged Applications**
- **Operating Temperature***
 - Commercial: 0°C to +55°C
 - Rugged: -40°C to +71°C
- **Mechanical Options (ANSI/VITA 48)**
 - Air-cooled; 3U, 5 HP/1.0" pitch
 - Conduction-cooled; 3U, 5 HP/1.0" pitch
- **Power***
 - 70W (Typical, Maximum)

*Note: Maximum performance and temperature ranges are dependent on system environment, utilization, and thermal conditions; sustained operation at peak loads may not be supported – refer to documentation for specific guidelines

Board Platform NAI-XMC Details

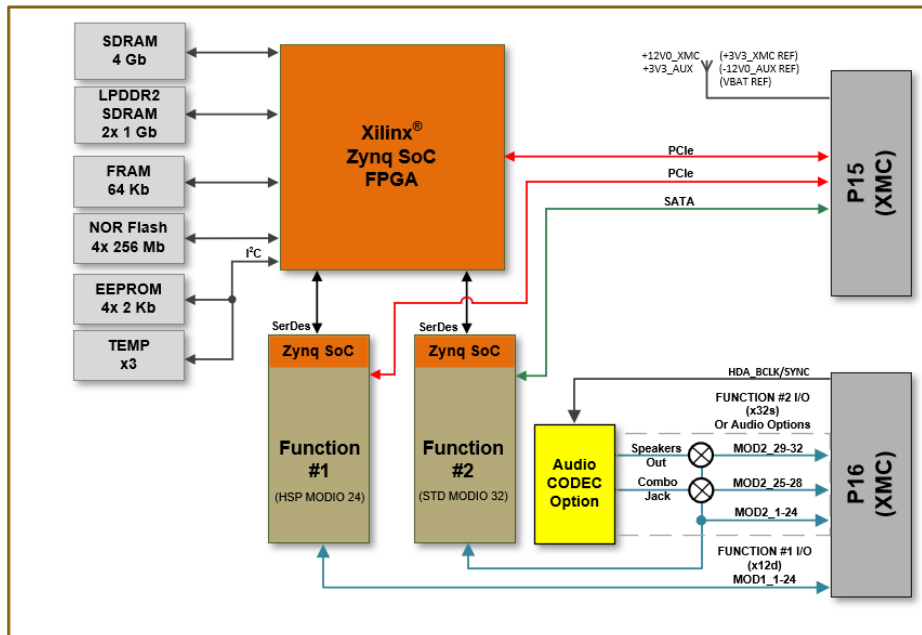

NAI-XMC I/O Block Diagram

Select up to 2 functions for your application (with NAI-XMC configuration option)

For a full listing of available smart functions and detailed specifications please visit <https://www.naii.com/functions>

I/O Modules
Digital IO Including Differential, Discrete, Relay, TTL/CMOS, Variable Reluctance
Measurement Modules
LVDT / RVDT Measurement, IRIG Timecode Receiver and Generator, Thermocouple and RTD Measurement, Synchro / Resolver Measurement, Strain Gauge Meas.
Communication Modules
ARINC 429/575, CAN bus, Ethernet NIC, MIL-STD-1553, MIL-STD-1760, IEEE- 1394b (FireWire), Serial RS232/422/485
Combination Modules
Multiple Choices of Combinations of I/O and Communications
SSD Expansion Memory
Multiple Choices of High Capacity SATA SSD Expansion Memory

Architected for Versatility

NAI's Configurable Open System Architecture™ (COSA®) offers a choice of over 100 smart I/O, communications, or Ethernet switch functions, providing the highest packaging density and greatest flexibility of any 3U SBC in the industry. Preexisting, fully-tested functions can be combined in an unlimited number of ways quickly and easily.

One-Source Efficiencies

Eliminate man-months of integration with a configured, field-proven system from NAI. Specification to deployment is a seamless experience as all design, state-of-the-art manufacturing, assembly and test are performed - by one trusted source. All facilities are located within the U.S. and optimized for high-mix/low volume production runs and extended lifecycle support.

Product Lifecycle Management

From design to production and beyond, NAI's product lifecycle management strategy ensures the long-term availability of COTS products through configuration management, technology refresh and obsolescence component purchase and storage



Made in the USA
Certified Small Business