

VPX3U-THOR-CX7-PAY

PRELIMINARY

NVIDIA® IGX Thor™ ConnectX®-7, Payload

OVERVIEW

The VPX3U-THOR-CX7-PAY module meets the needs of demanding C5ISR applications, providing a secure compute node with advanced AI and HPC processing capabilities, high data transfer rates, and the cyber security features required to ensure data is being protected. This SOSA aligned module includes an NVIDIA® IGX THOR™, and an NVIDIA® ConnectX®-7 SmartNIC for high bandwidth applications.

Accelerated by the Blackwell GPU, with 128GB of ECC memory and delivering 2070 FP4 TFLOPS of AI compute makes this a superior platform for data processing, deep learning inference, machine vision, sensor fusion and robotics. The NVIDIA ConnectX-7 SmartNIC provides secure, high-speed network data transfer and a configurable PCIe switch. Support for RDMA over Converged Ethernet (RoCE) and NVIDIA GPUDirect, enables the fastest method to transfer data across a network to the GPU.

Unlocking the best performance requires the best cooling methods. WOLF's unique architecture and advanced cooling technology can efficiently move over 100W of heat to the chassis rails, better than any solid metal can perform. **Contact WOLF for any additional questions (ex. PCIe Gen 5, Safety, Security, Custom options, etc.)**

KEY FEATURES

- 2070 FP4 TFLOPs AI Compute
- Embedded Blackwell GPU, with 2560 CUDA cores and 96 Gen 5 Tensor cores
- Multi-Instance GPU (MIG) support, two instances.
- 14-core Arm® Neoverse®-V3AE CPU, 2.6GHz
- 128 GB ECC LPDDR5X 256-bit memory at 273 GB/s
- ConnectX-7, provides up to 100GbE, PCIe Gen5
- DisplayPort MST/HDMI output
- Module power: configurable from 70W - 150W
- High level of ruggedization (and custom options):
 - Operating temperature: -40° to +85°C
 - Vibration (sine wave): 10G peak, 5 - 2000Hz
 - Shock: 40G peak
- Dimensions: 160mm x 100mm x 25.4mm
- Weight (approx.): 1.5kg
- ANSI/VITA 48, 65 (VPX REDI, OpenVPX)
- SOSA® Aligned SBC slot profile 14.2.16



WOLF

ADDITIONAL IGX THOR FEATURES

- Industrial Grade (extended temp, shock, and vibration)
- Functional Safety (ISO-26262, DO-178C/254 capable)
- Supports wide range of generative AI models
- Runs NVIDIA Isaac™ GR00T, Metropolis, and Holoscan
- Up to 6× 4Kp60 (H.265) encode
- Up to 10× 4Kp60 (H.265) decode
- IGX OS (Enterprise SW)
- CUDA® 13, OpenGL® 4.6, OpenGL ES 3.2, Vulkan™ 1.2
- 10 year lifecycle to 2035

CONNECTIVITY / SYSTEM MANAGEMENT

- 1TB NVMe storage
- ConnectX-7 PCIe Switch, two configurable x8 ports, may bifurcate down to x4 + x4
- Backplane Ethernet with 40/100GBASE-KR4 and two 10/25GBASE-KR
- ConnectX-7 with NVIDIA ASAP2, GPUDirect Storage, and RoCE support
- Optional 2.5GBASE-T Ethernet with TSN support to P2B
- Optional USB 3.2 and USB 2.0 to P2B
- Optional CAN bus (x2) to P2B
- Front panel USB-C for setup/debug
- Advanced IPMC and security management features


THIS INFORMATION IS SUBJECT TO CHANGE

VPX3U-THOR-CX7-PAY


PRELIMINARY

NVIDIA® IGX Thor™ ConnectX®-7, Payload

This configuration provides 2.5GBASE-T, one DisplayPort, CAN bus, and USB 3.0 to P2B (normally not populated).

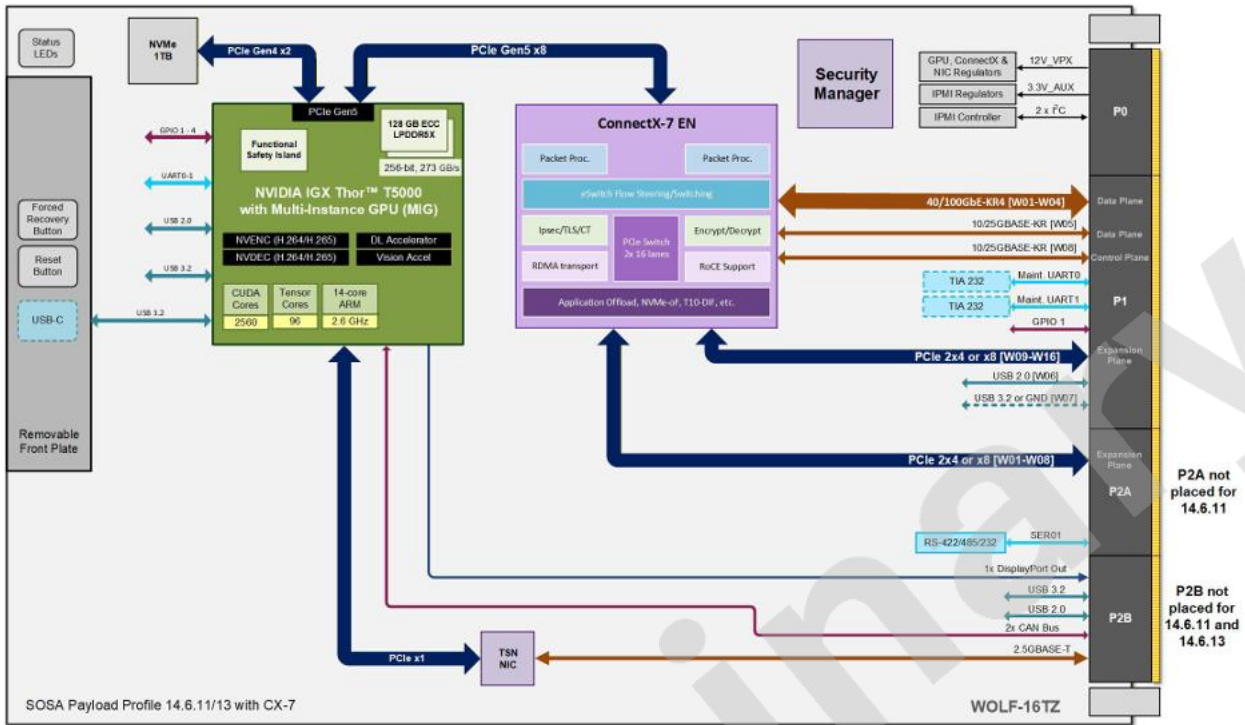

This configuration provides 2.5GBASE-T, and two DisplayPort to P2B (normally not populated).

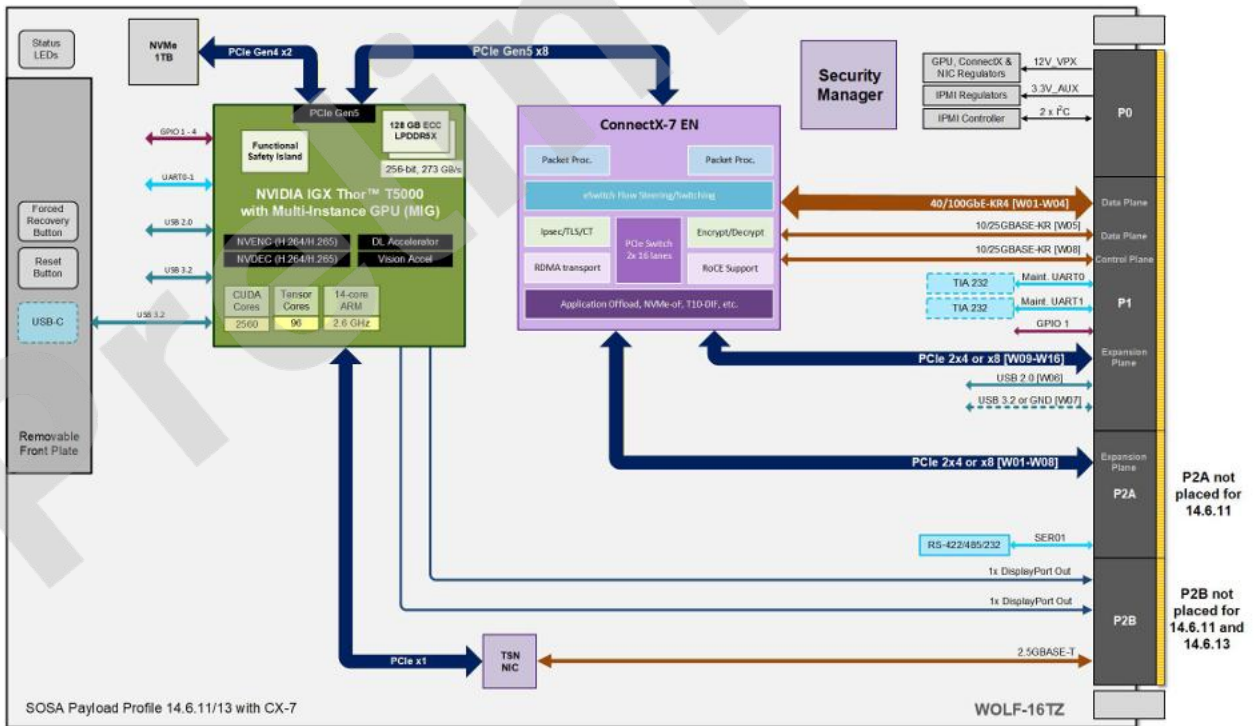

THIS INFORMATION IS SUBJECT TO CHANGE